



PRODUCT CATALOGUE

Manufacturing Company
Of All Kind
Shrink Tunnel
Machines

Shrink Tunnel Machine 3020



MODEL	KP 3020
Tunnel Size (W x H) mm	300 X 200
Voltage (V/Hz)	220/50
Power Consumption (KW) (Start up Load)	5
Power Consumption (KW) (Running Load)	3.75
Conveyor Loading (Kg)	10
Overall Dimension (L*W*H)	800x450x520
Speed (m/min.)	0 ~ 6
Heating Time (minutes)	5
Cooling Time (minutes)	15
Net Weight	45

Shrink Tunnel Machine 4525



Model	KP 4525 S
Tunnel Size (W x H) mm	450 x 250
Voltage (V/Hz)	220/440 /50
Power Consumption (KW)	6.5
Conveyor Loading (Kg)	15
Tunnel Size (LxWxh) (mm)	900x450x50-250
Overall Dimension (LxWxH) (mm)	1200x610x1100
Speed (m/min.)	0 ~ 10
Heating Time (minutes)	10
Cooling Time (minutes)	15
Net Weight	90

Shrink Tunnel Machine 4535



Model	KP 4525
Tunnel Size (W x H) mm	450 x 250
Voltage (V/Hz)	220/440 /50
Power Consumption (KW)	6.5
Conveyor Loading (Kg)	15
Tunnel Size (LxWxh) (mm)	900x450x50-250
Overall Dimension (LxWxH) (mm)	1200x610x1100
Speed (m/min.)	0 ~ 10
Heating Time (minutes)	10
Cooling Time (minutes)	15
Net Weight	90

Shrink Tunnel Machine 6535



Model	KP 6535
Tunnel Size (W x H) mm	650 x 350
Voltage (V/Hz)	380 /50
Power Consumption (KW)	12.5
Conveyor Loading (Kg)	30
Heating Furnace	1200x650x50~350*
Overall Dimension	1200x850x1340
Speed (m/min.)	0 ~ 10
Heating Time (minutes)	10
Cooling Time (minutes)	15
Net Weight	150

Web sealer with Shrink Tunnel




Brand	Kopack
Model	automatic IPSX 6030X
Voltage (V/Hz)	220/50
Film Used	PVC, PE
External Dimension (LxWxH)(mm)	1370 x 920 x 1800
Net Weight (Kg)	380
Power Load (KW)	1.5
Compressed Air (Kg/cm3)	6
Sealing & Cutting Length (mm)	650
Max. Packing Size (LxWxH)(mm)	500 x 290 x 380
Packing Speed (pcs/min.)	0 ~ 12

Shrink Tunnel Machine For LDPE



Model	KP 4535 LDPE
Conveyor Load	15 kg
Motor	90 W
Voltage	380 V 50/60 Hz
Conveyor Type	Mesh
Shrink Oven Size	1200x450x350 (mm)
Machine Size	2200x700x1000(mm)
Model	SP 4535 LDPE

Strem Label Shrink Tunnel

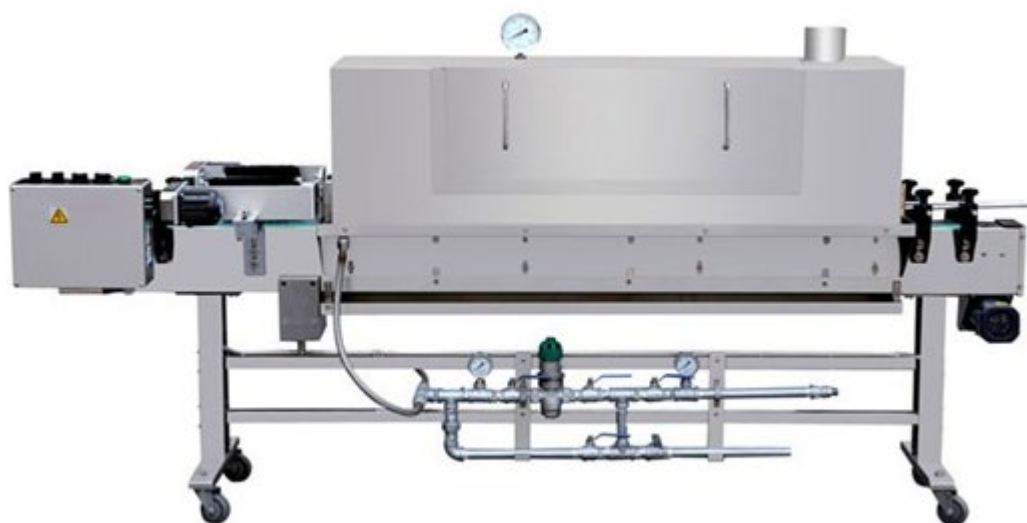

Model	KP 1838
Voltage	220V/50HZ
Power	150W
Weight	150Kg
Tunnel Size	1350*180*380mm
Capacity	5000~15000B/H
Steam Pressure	0.1Mpa
Steam Consumption	24Kg/H
Shrink Temperature	75~85°
Dimension (L*W*H)	2400*430*1350mm
Net Weight	91 Kg

Shrink Tunnel



Model	KP 1230
Voltage (V/Hz)	3 phase 380 /50
Power (KW)	10
Max. packing size (l xh) (mm)	120 x 300
Packing speed (pcs /hour)	8000 ~ 12000
Tunnel size (l x w x h)(mm)	1500 x120 x 300
External dimensions (l x w xh) (mm)	1800 x 600 x 1665
Net Weight (Kg)	250

Label Shrink Tunnel For Bottle



Model	KP 1538
Voltage	220 V/ 50-60 Hz
Power	8 kw
Tunnel Size (L x W x H) (mm)	1000 x 150 x 380
Max. Packing Size (mm)	φ 105 x 350 H
Conveyor Motor	AC90W/220V
Conveyor Speed	0~10/m/min
90W/220V Maximum Loading	15 kgs
Shrink Film	POF, PVC, PP
Dimension (mm)	1500 x 350 x 1500
Net Weight	96 kg

Label Shrink Tunnel For Cap



Model	KP 1538
Voltage	220V/ 50-60HZ
Power	7kw
Tunnel Size (LxWxH)mm	1000x150x150
Max. Packing Size(mm)	φ105x340H
Conveyor Motor	AC90W/220V
Conveyor Speed	0-10m/min
Max. Loading	15kg
Shrink Film	POF,PVC,PP
Weight(kg)	90kg
Dimension(mm)	1500x350x1500

Lable Shrink Machine For Bottle



Model	KP 1538
Voltage	220V/ 50-60HZ
Power	8 kw
Tunnel Size (LxWxH)mm	800x200x400
Max. Packing Size(mm)	φ160x350H
Conveyor Motor	DC50W/220V
Conveyor Speed	0-10m/min
Max. Loading	15 kg
Shrink Film	POF,PVC,PP
Weight(kg)	66 kg
Dimension(mm)	1500x400x1520